



## ELECTRO-PNEUMATIC DUCT VALVE SER-851 butterfly type

Diameters from 100 to 1000 mm  
 Galvanized or stainless steel  
 Standard or ATEX (zone 22) model  
 Normal air pressure 6 bar  
 Solenoid voltage 24Vcc  
 Solenoid power 5W

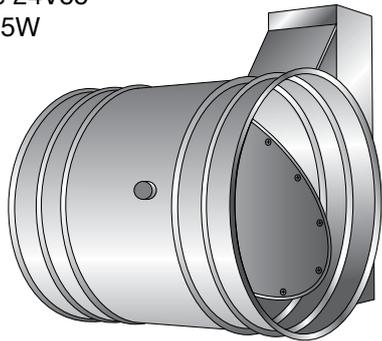


## ELECTRO-PNEUMATIC DUCT VALVE SER-852 slide type (or sash type)

Diameters from 100 to 800 mm  
 Galvanized or stainless steel  
 Standard or ATEX (zone 22) model  
 Normal air pressure 6 bar  
 Solenoid voltage 24Vcc  
 Solenoid power 5W

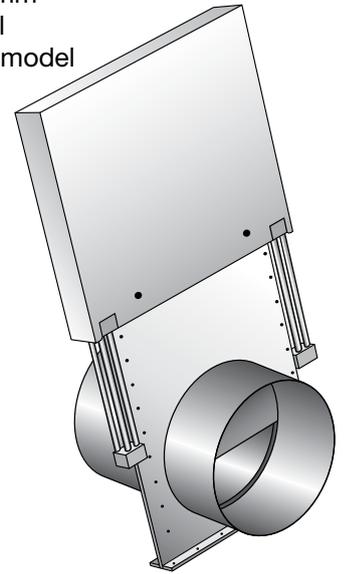

## ELECTRO-PNEUMATIC DUCT VALVE SER-853 flapper type (fold-away type)

Diameters from 150 to 600 mm  
 Galvanized or stainless steel  
 Standard or ATEX (zone 22) model  
 Normal air pressure 6 bar  
 Solenoid voltage 24Vcc  
 Solenoid power 5W

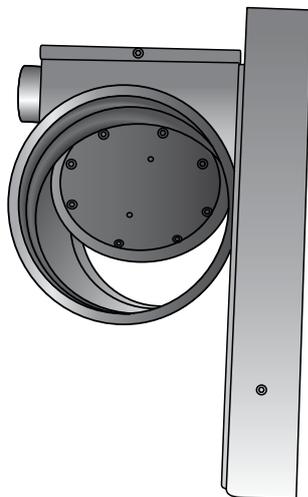

## FAST THREE-WAY FIRE DUCT VALVE SER-854

Diameters on demand  
 Galvanized steel  
 ATEX model not available  
 Normal air pressure 6 bar  
 Solenoid voltage 24Vcc  
 Solenoid power 5W

D = duct diameter  
 L = valve length  
 H = lateral dimensions  
 F = flange length  
 T = total length

